
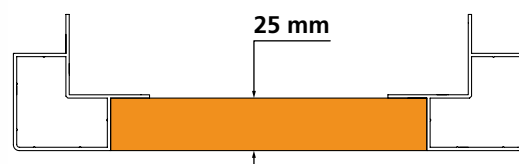




Standard system with nylon corners

Panel thickness 25 mm
External dimension 50 mm

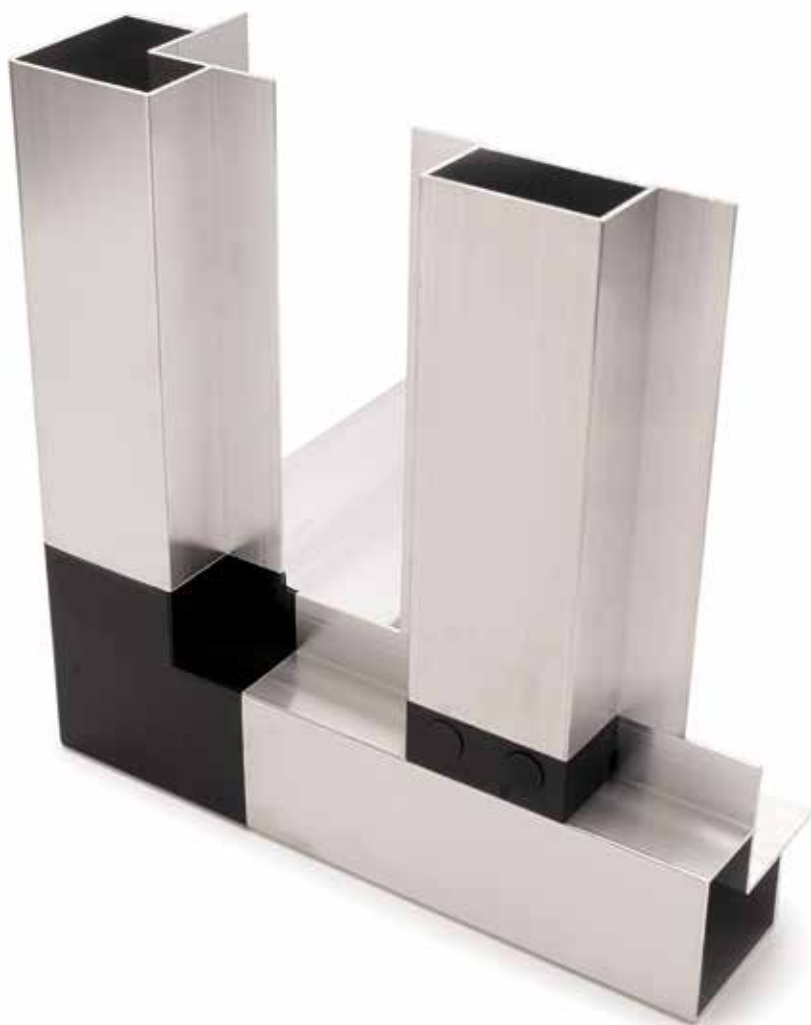

This is the “light” standard system thanks to the use of nylon corners. Since it is a standard series, the assembly procedure of the different parts of the frame remains unchanged.

Cutting conditions of the profiles



$$A = Y - 150 \text{ mm} / 5.85''$$

$$B = Y - 100 \text{ mm} / 3.9''$$


$$C = Y - 140 \text{ mm} / 5.46''$$

The formulas are valid for all sides of the module
Y = external dimension


Nylon accessories

AFG530-250 Main corner	GFG250-250 Omega joint	TECHNICAL DATA	
		Panel thickness	25 mm / 0.98"
Weight: 180 g	Weight: 26 g	Material	PA6 + GF 20%
		Color	RAL

AFG530-250

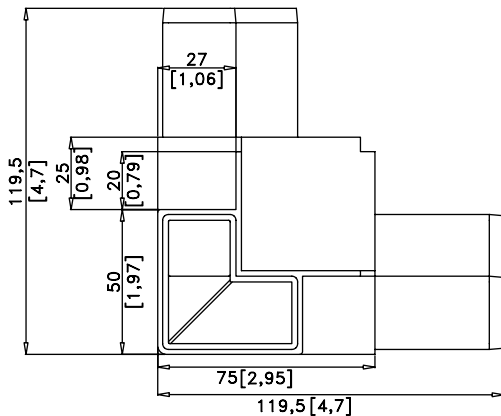

GFG250-250

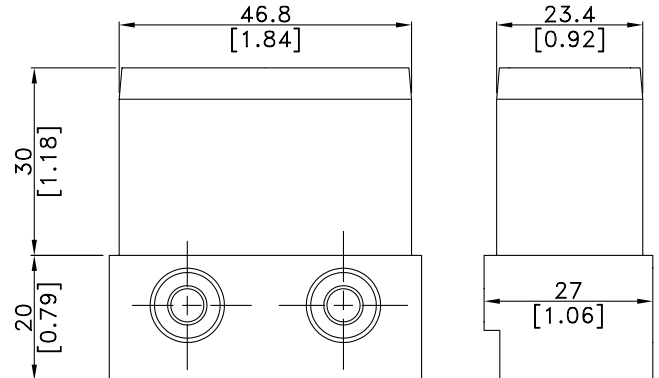


Aluminium profiles


TECHNICAL DATA

Material	Extruded aluminium EN AW 6060
Treatment	T6
Color	RAL


P150-25000 Main profile

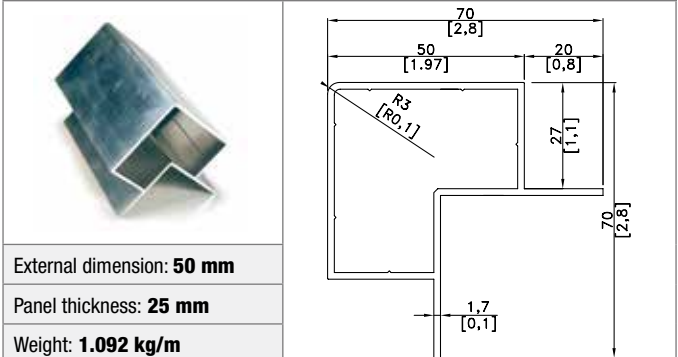

P250-25000 Omega profile with channel

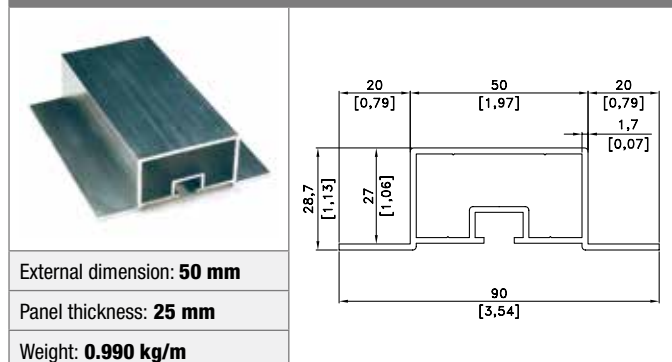

P350-25000 Omega profile without channel

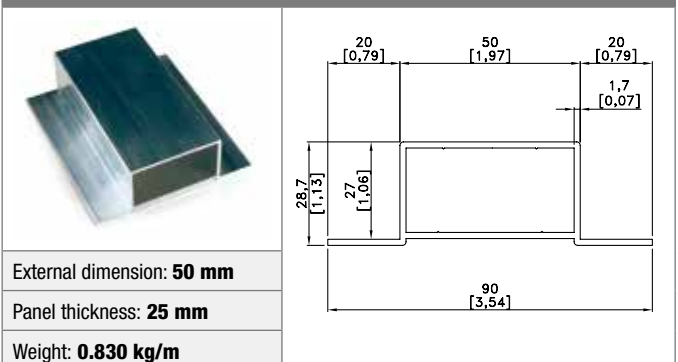

Bases


BAS150-250 Base profile



External dimension: **50 mm**

Panel thickness: **25 mm**

Weight: **2.522 kg/m**

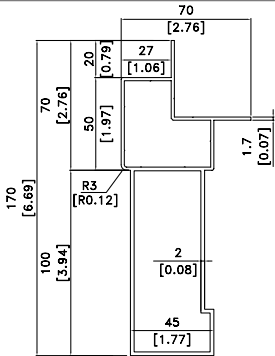


FE-1000000 Corner for base



External dimension: **100 mm**

Material: **Galvanized steel**

Weight: **610 g**

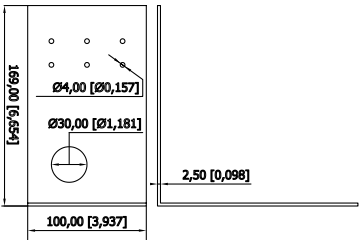

Unit connection


TH5009-000 Unit connection with screws



External dimension: **40 mm**

Material: **EN AB 46100**

Weight: **40 g**



GU-9000000 90° Unit connection



External dimension: **40 mm**

Material: **EN AB 46100**

Weight: **116 g**

