




Double-walled system with nylon corners

Panel thickness 45-60 mm
External dimension 60 mm

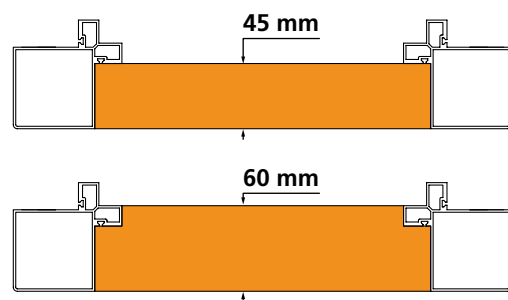

The most efficient method to create AHU modules with continuous internal surfaces, without wedges and interruptions. This particular profile design, allows for the use of both traditional panels and double wall panels. In any case, the fixing screws of the panels remain hidden in the chamber of the profile. The resulting surfaces are thus free of protrusions and therefore easily washable.

Cutting conditions of the profiles



$$A = Y - 160 \text{ mm} / 6.24''$$


$$C = Y - 160 \text{ mm} / 6.24''$$

The formulas are valid for all sides of the module
Y = external dimension


Nylon accessories

AFGDP60-45 Main corner	GFGTT60-45 Omega joint	TECHNICAL DATA	
		Panel thickness	45-60 mm / 1.77-2.36"
Weight: 266 g	Weight: 44 g	Material	PA6 + GF 20%
		Color	Black

AFGDP60-45

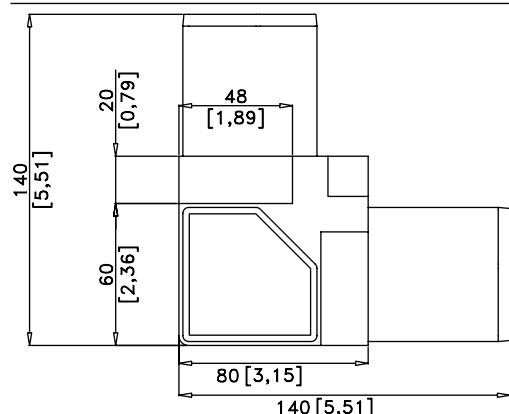


GFGTT60-45

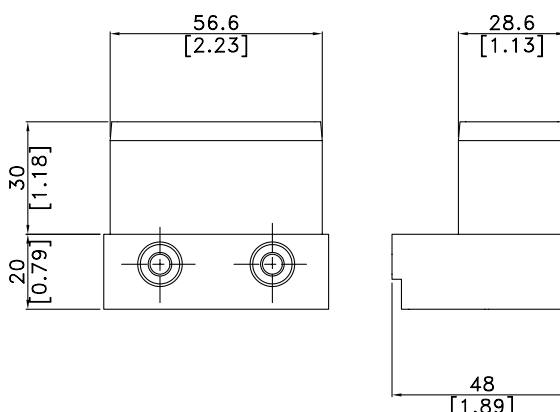


Aluminium profiles

TECHNICAL DATA		Treatment	T6
Material	Extruded aluminium EN AW 6060	Color	RAL

PDP160-450 Main profile

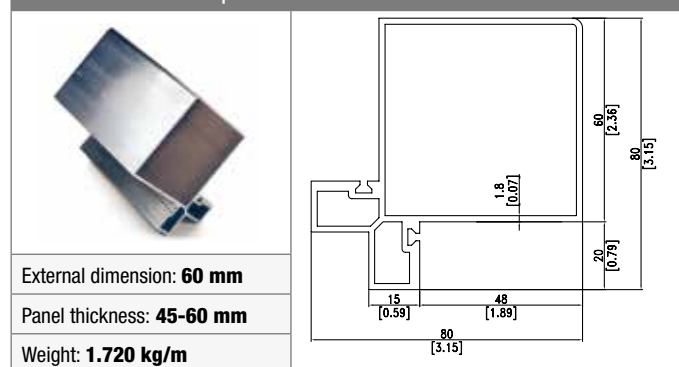


PDP260-450 Omega profile without channel

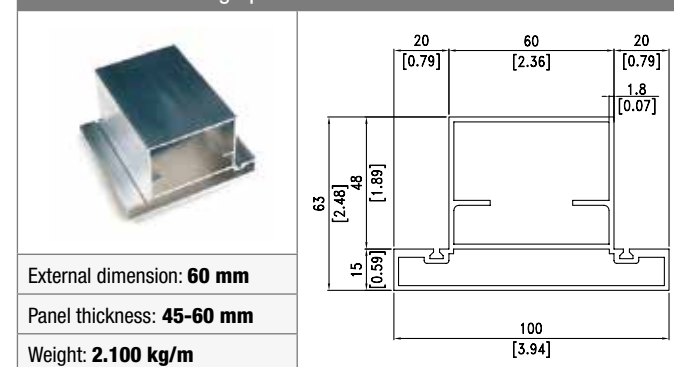

Unit connection

TH5009-000 Unit connection with screws

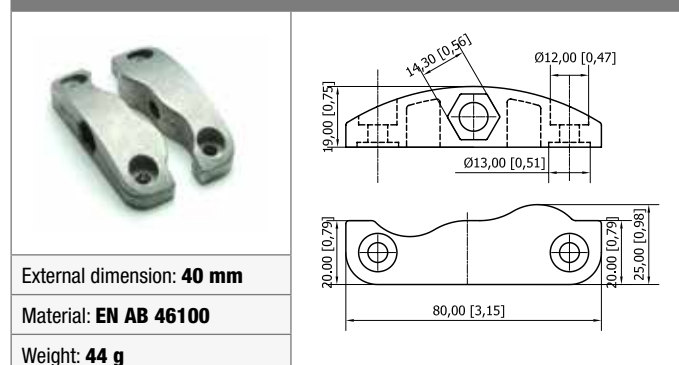

GU-9000000 90° Unit connection

