




Double-walled internally rounded system with aluminium corners

Panel thickness 40 mm
External dimension 40 mm

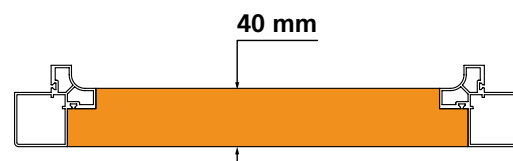

In cases in which constant sanitation of the plant chambers is required, the double walled system, rounded internally, allows to assemble modules with continuous surfaces without corners with sharp edges.

Cutting conditions of the profiles



$$A = Y - 120 \text{ mm} / 4.68''$$


$$C = Y - 120 \text{ mm} / 4.68''$$

The formulas are valid for all sides of the module
Y = external dimension


Aluminium accessories

ADPA430-25 Main corner	GOP240-250 Omega joint	TECHNICAL DATA	
		Panel thickness	40 mm / 1.56"
Weight: 380 g	Weight: 62 g	Material	EN AB 46100
		Color	RAL

ADPA430-25

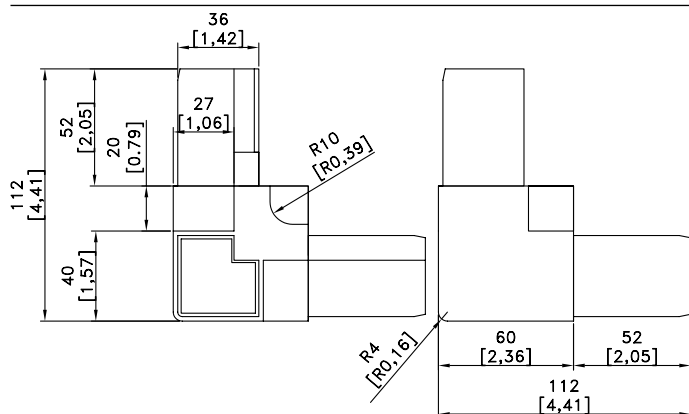


GOP240-250

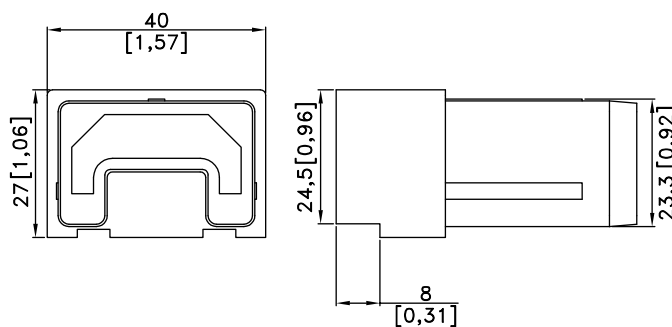


Aluminium profiles

TECHNICAL DATA		Treatment	T6
Material	Extruded aluminium EN AW 6060	Color	RAL

PDPA140-25 Main profile

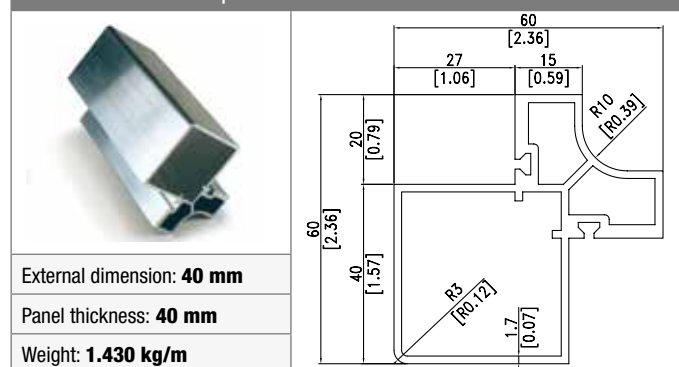


PDP240-250 Omega profile without channel

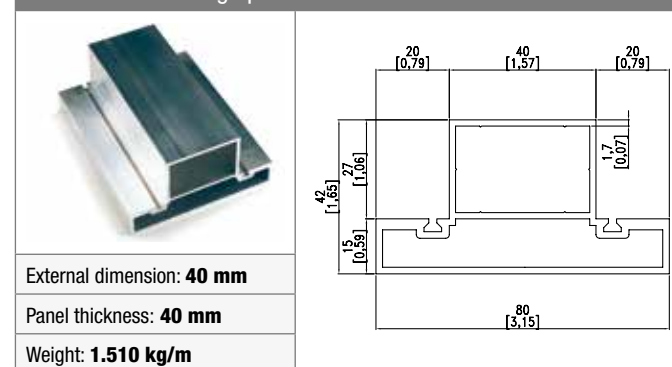

Unit connection

TH5009-000 Unit connection with screws

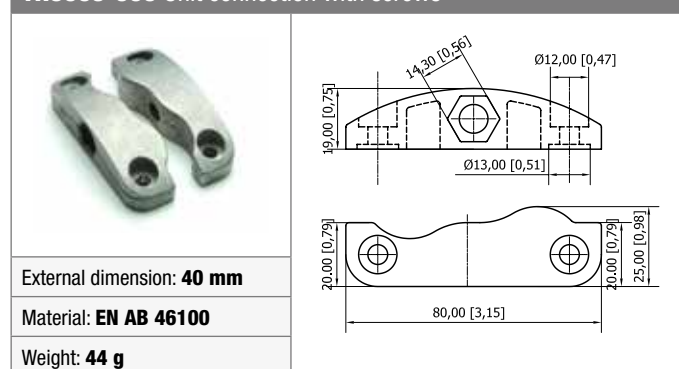

GU-9000000 90° Unit connection

