


Standard system with aluminium corners



Panel thickness 18 mm
External dimension 20 mm

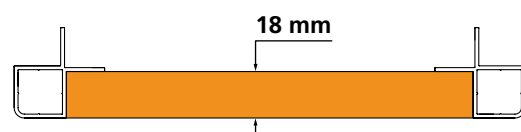

The APS Arosio system is born here.

The standard structure has simple lip profiles available and offers a wide range of combinations. Thanks to its simplicity, it is confirmed among the most used systems by those who deal in AHU. Use practicality and versatility make this system the reference point of all the manufacturers.

Cutting conditions of the profiles



$$A = Y - 70 \text{ mm} / 2.73''$$

$$B = Y - 40 \text{ mm} / 1.56''$$

The formulas are valid for all sides of the module
Y = external dimension

Aluminium accessories

TECHNICAL DATA


Panel thickness	18 mm / 0.7"
Material	EN AB 46100
Color	RAL

A230-18000

Main corner



Weight: **76 g**

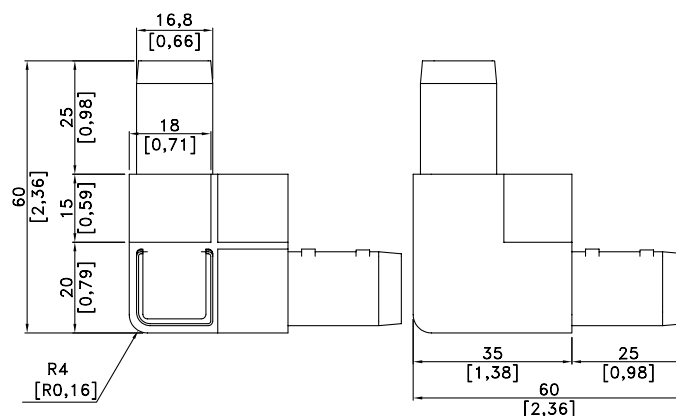

Aluminium profiles

TECHNICAL DATA

Material	Extruded aluminium EN AW 6060
----------	-------------------------------

Treatment	T6
Color	RAL


P120-18000 Main profile



External dimension: **20 mm**

Panel thickness: **18 mm**

Weight: **0.430 kg/m**

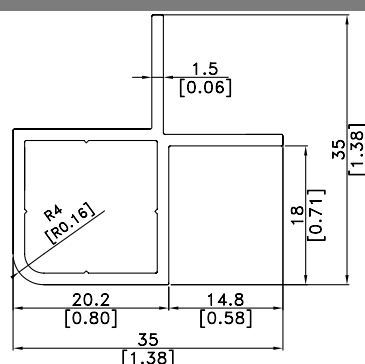

P220-18000 Omega profile without channel



External dimension: **20 mm**

Panel thickness: **18 mm**

Weight: **0.500 kg/m**

