


Standard system with aluminium corners



Panel thickness 25 mm
External dimension 70 mm

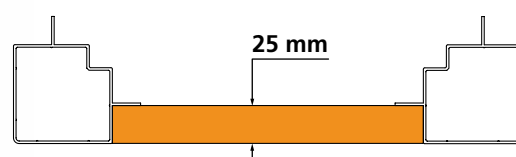

The APS Arosio system is born here.

The standard structure has simple lip profiles available and offers a wide range of combinations. Thanks to its simplicity, it is confirmed among the most used systems by those who deal in AHU. Use practicality and versatility make this system the reference point of all the manufacturers.

Cutting conditions of the profiles



$$A = Y - 180 \text{ mm} / 7.08''$$

$$B = Y - 140 \text{ mm} / 5.51''$$


$$C = Y - 180 \text{ mm} / 7.08''$$

The formulas are valid for all sides of the module
Y = external dimension


Aluminium accessories

A730-25000 Main corner	GOP270-250 Omega joint	TECHNICAL DATA	
		Panel thickness	25 mm / 0.98"
Weight: 1050 g	Weight: 116 g	Material	EN AB 46100
		Color	RAL

A730-25000


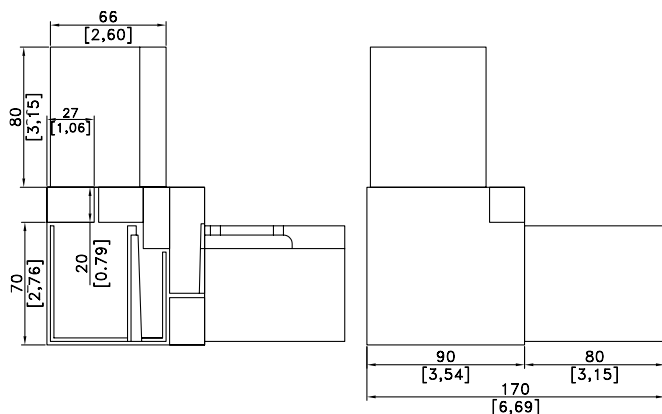



GOP270-250

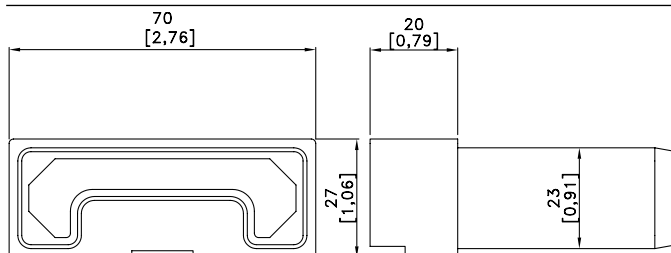


Aluminium profiles


TECHNICAL DATA		Treatment	T6
Material	Extruded aluminium EN AW 6060	Color	RAL

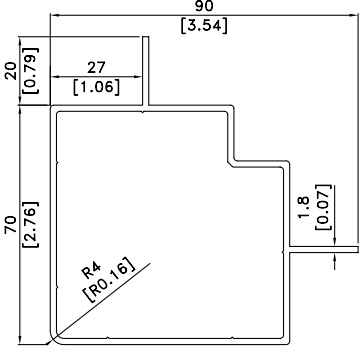P170-25000 Main profile	
	
External dimension: 70 mm	
Panel thickness: 25 mm	
Weight: 1.700 kg/m	

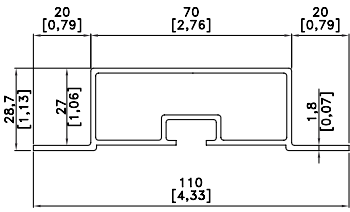P270-25000 Omega profile with channel	
	
External dimension: 70 mm	
Panel thickness: 25 mm	
Weight: 1.240 kg/m	

Unit connection

TH5009-000 Unit connection with screws	
	
External dimension: 40 mm	
Material: EN AB 46100	
Weight: 44 g	

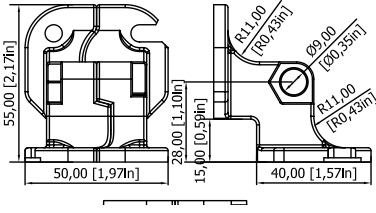GU-9000000 90° Unit connection	
	
External dimension: 40 mm	
Material: EN AB 46100	
Weight: 116 g	