


Standard system with aluminium corners



Panel thickness 25 mm
External dimension 40 mm

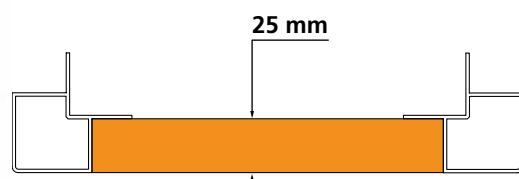

The APS Arosio system is born here.

The standard structure has simple lip profiles available and offers a wide range of combinations. Thanks to its simplicity, it is confirmed among the most used systems by those who deal in AHU. Use practicality and versatility make this system the reference point of all the manufacturers.

Cutting conditions of the profiles



$$A = Y - 120 \text{ mm} / 4.68''$$

$$B = Y - 80 \text{ mm} / 3.12''$$


$$C = Y - 120 \text{ mm} / 4.68''$$

The formulas are valid for all sides of the module
Y = external dimension


Aluminium accessories

AC430-2500 Main corner	GOP240-250 Omega joint	TECHNICAL DATA	
		Panel thickness	25 mm / 0.98"
Weight: 340 g	Weight: 62 g	Material	EN AB 46100
		Color	RAL

AC430-2500

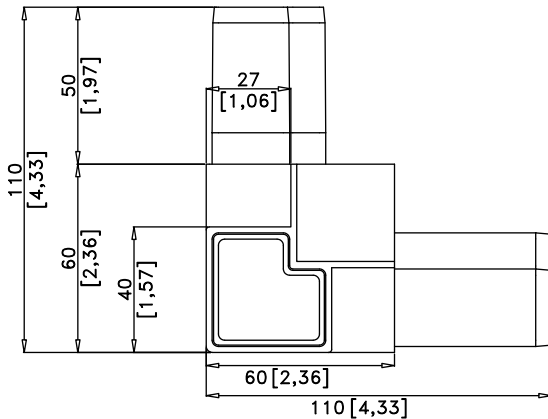

GOP240-250

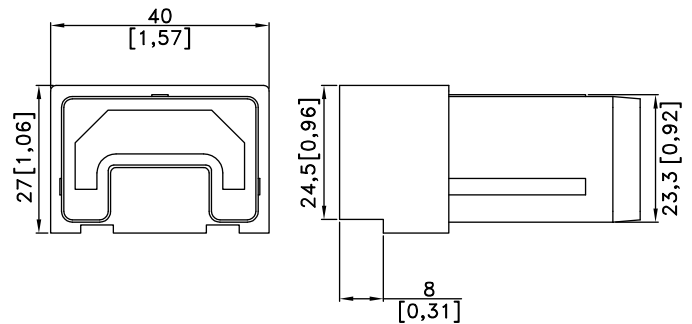


Aluminium profiles


TECHNICAL DATA

Material	Extruded aluminium EN AW 6060
Treatment	T6
Color	RAL


P140-25000 Main profile

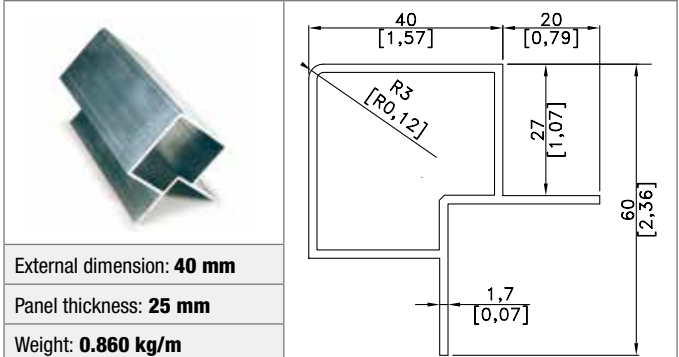

P240-25000 Omega profile with channel

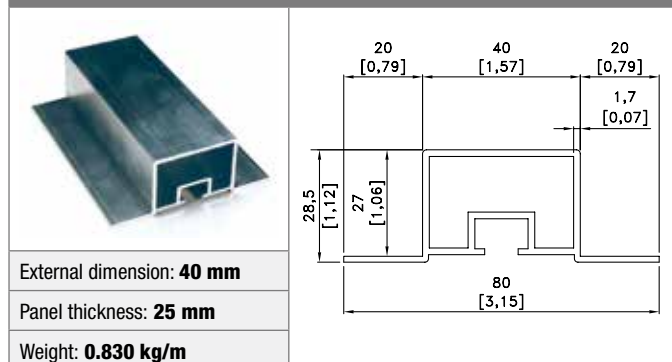

P340-25000 Omega profile without channel

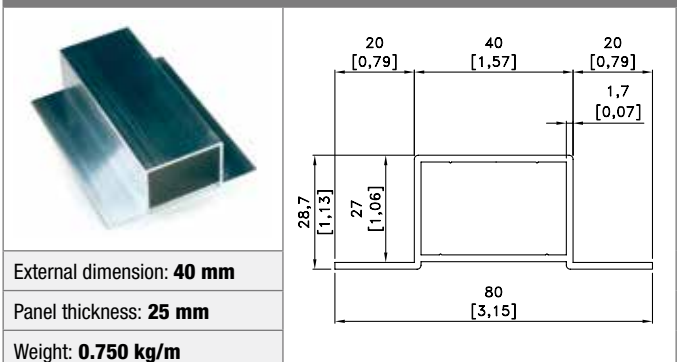

BAS140-250 Base profile External dimension: 40 mm Panel thickness: 25 mm Weight: 2.400 kg/m	FE-1000000 Corner for base External dimension: 100 mm Material: Galvanized steel Weight: 610 g
---	--

TH5009-000 Unit connection with screws		GU-9000000 90° Unit connection	
External dimension: 40 mm		External dimension: 40 mm	
Material: EN AB 46100		Material: EN AB 46100	
Weight: 44 g		Weight: 116 g	

