


Standard system with aluminium corners



Panel thickness 25 mm
External dimension 50 mm

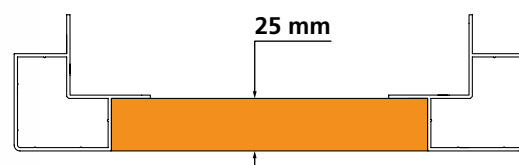

The APS Arosio system is born here.

The standard structure has simple lip profiles available and offers a wide range of combinations. Thanks to its simplicity, it is confirmed among the most used systems by those who deal in AHU. Use practicality and versatility make this system the reference point of all the manufacturers.

Cutting conditions of the profiles



$$A = Y - 140 \text{ mm} / 5.46''$$

$$B = Y - 100 \text{ mm} / 3.9''$$


$$C = Y - 140 \text{ mm} / 5.46''$$

The formulas are valid for all sides of the module
Y = external dimension


Aluminium accessories

AC530-2500 Main corner	GOP250-250 Omega joint	TECHNICAL DATA	
		Panel thickness	25 mm / 0.98"
		Material	EN AB 46100
		Color	RAL
Weight: 445 g	Weight: 87 g		

AC530-2500

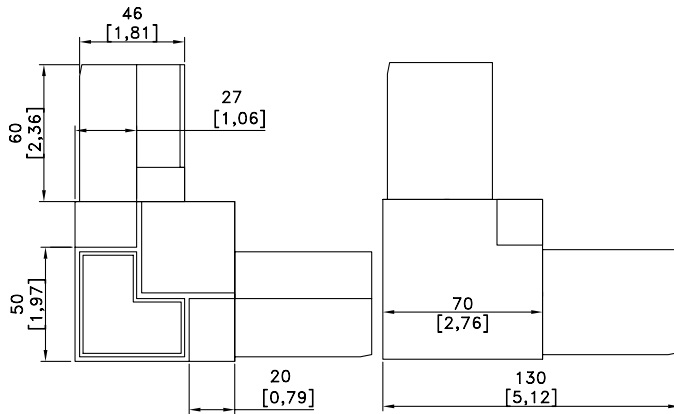

GOP250-250

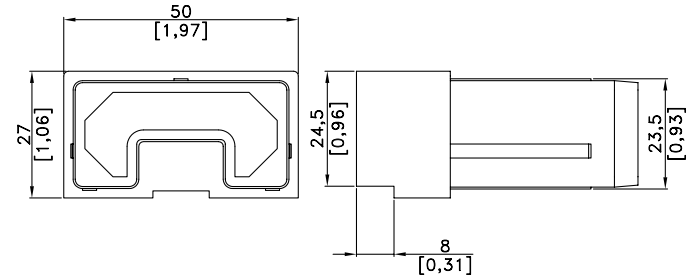


Aluminium profiles


TECHNICAL DATA

Material	Extruded aluminium EN AW 6060
Treatment	T6
Color	RAL


P150-25000 Main profile

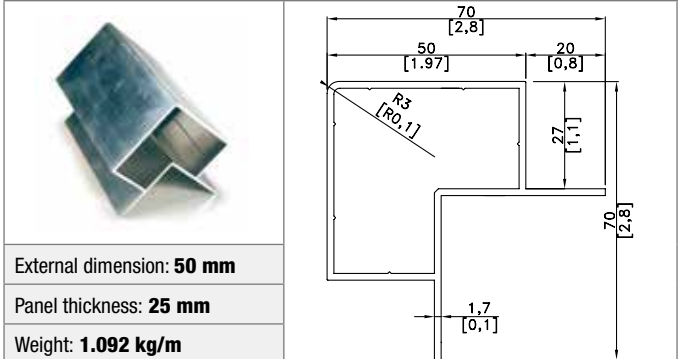

P250-25000 Omega profile with channel

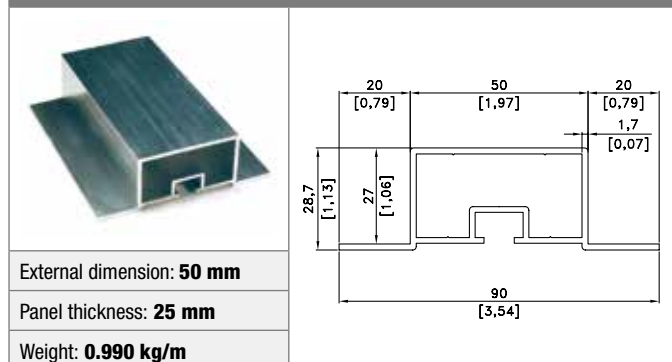

P350-25000 Omega profile without channel

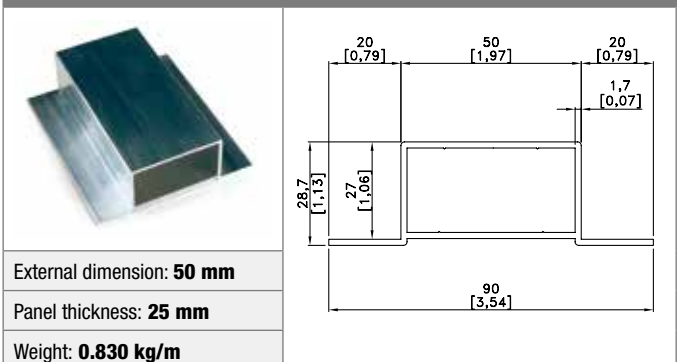

Bases


BAS150-250 Base profile



External dimension: **50 mm**

Panel thickness: **25 mm**

Weight: **2.522 kg/m**

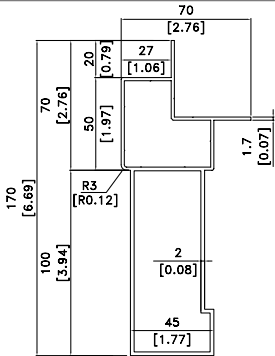


FE-1000000 Corner for base



External dimension: **100 mm**

Material: **Galvanized steel**

Weight: **610 g**

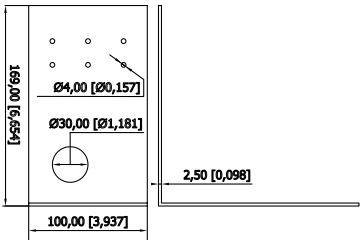

Unit connection


TH5009-000 Unit connection with screws



External dimension: **40 mm**

Material: **EN AB 46100**

Weight: **44 g**



GU-9000000 90° Unit connection



External dimension: **40 mm**

Material: **EN AB 46100**

Weight: **116 g**

