
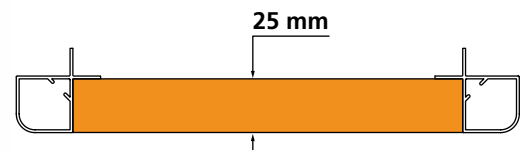




Standard system with nylon corners

Panel thickness 25 mm
External dimension 30 mm

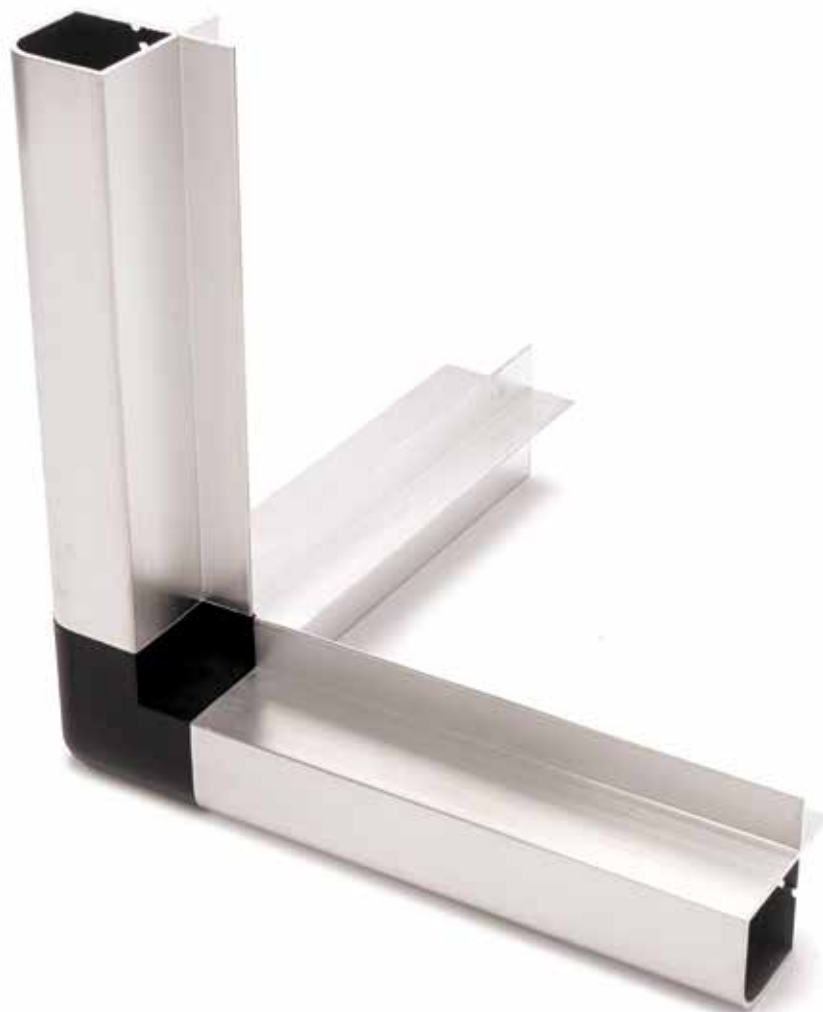

This is the “light” standard system thanks to the use of nylon corners. Since it is a standard series, the assembly procedure of the different parts of the frame remains unchanged.

Cutting conditions of the profiles




$$A = Y - 90 \text{ mm} / 3.9''$$

The formulas are valid for all sides of the module
Y = external dimension

Nylon accessories


AAFG330-25 Main corner	
	TECHNICAL DATA
	Panel thickness
	25 mm / 0.98"
	Material
	PA6 + GF 20%
Weight: 56 g	Color
	RAL

AAFG330-25

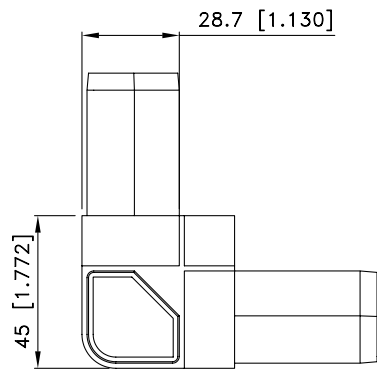


Aluminium profile

TECHNICAL DATA	
Material	Extruded aluminium EN AW 6060
Treatment	T6
Color	RAL

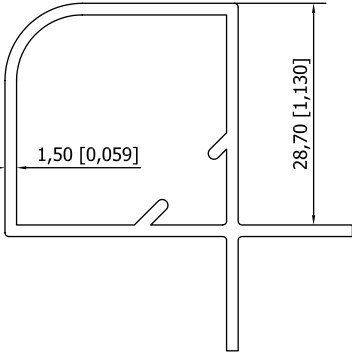PA130-2500 Main profile	
	
	External dimension: 40 mm
	Panel thickness: 25 mm
	Weight: 0.600 kg/m

Unit connection

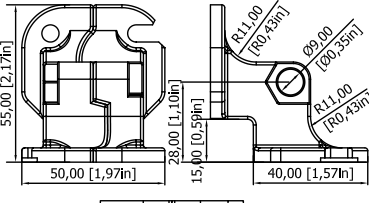GU-9000000 90° Unit connection	
	
	External dimension: 40 mm
	Material: EN AB 46100
	Weight: 116 g